
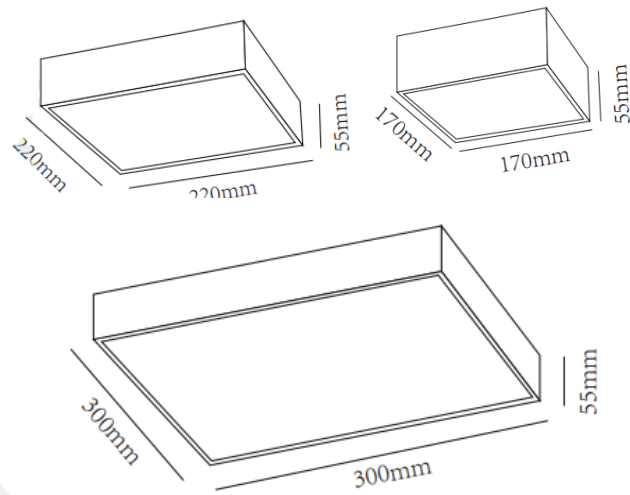


## DECORATIEVE VERLICHTING

PLAFOND OPBOUW

BEAM 0575 - 0576 - 0579

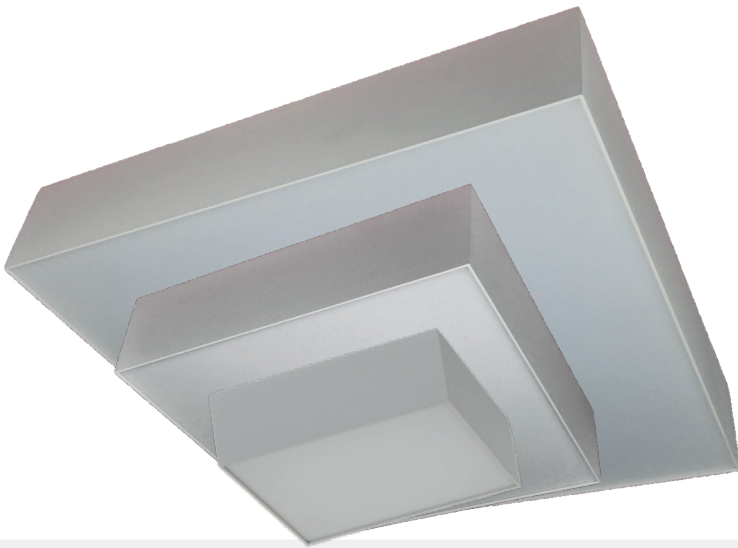

### TECHNISCHE GEGEVENS

|               |                         |
|---------------|-------------------------|
| Benaming      | Beam 0575 - 0576 - 0579 |
| Kleur toestel | Wit                     |
| Klasse        | LED                     |
| Richtbaar     | Nee                     |
| Dimbaar       | Nee                     |
| Voltage       | 220-240V 50-60Hz        |
| Lichtkleur    | 3000K                   |
| CRI           | >80                     |
| Stralingshoek | 120°                    |
| IP            | 20                      |
| UGR           | < 19                    |
| Energie label | A++                     |

### PRODUCTEIGENSCHAPPEN

- o Inclusief
- Module: Sanan LED Chips
- Driver: LIFUD Flicker-free

### UITVOERING

| Benaming  | Diameter         | Vermogen | Lumen  | Flux Code       |
|-----------|------------------|----------|--------|-----------------|
| Beam 0575 | 170 x 170 x 55mm | 15W      | 1500Lm | 47 79 96 99 98  |
| Beam 0576 | 220 x 220 x 55mm | 22W      | 2200Lm | 47 78 95 99 100 |
| Beam 0579 | 300 x 300 x 55mm | 35W      | 3000Lm | 46 78 95 99 100 |

